

TECHNICAL DATA SHEET

Item

D121G10A

Revision no.:

2

Filter media:

Filter area: *cm²* *Sq. inch*

Efficiency: μm (c) at $\beta=$ *in accordance to ISO 16889*

μm (c) at $\beta=$ *in accordance to ISO 16889*

Dirt holding capacity in accordance to ISO 16889 at final Dp 5 bar: *gr. ISO MTD*

Collapse pressure in accordance to ISO 2941: *Bar.* *Psi.*

By-pass valve: By-pass setting: *Bar.* *Psi.*


Operating temperature: *min* $^{\circ}\text{C}$ *max* $^{\circ}\text{C}$

Flow: Seal:

Fluid compatibility :

Notes :

Pressure drop charts in accordance to ISO 3968 (Class B) at clean element 30 cst viscosity 0,86 Kg/dm³ density mineral oil.

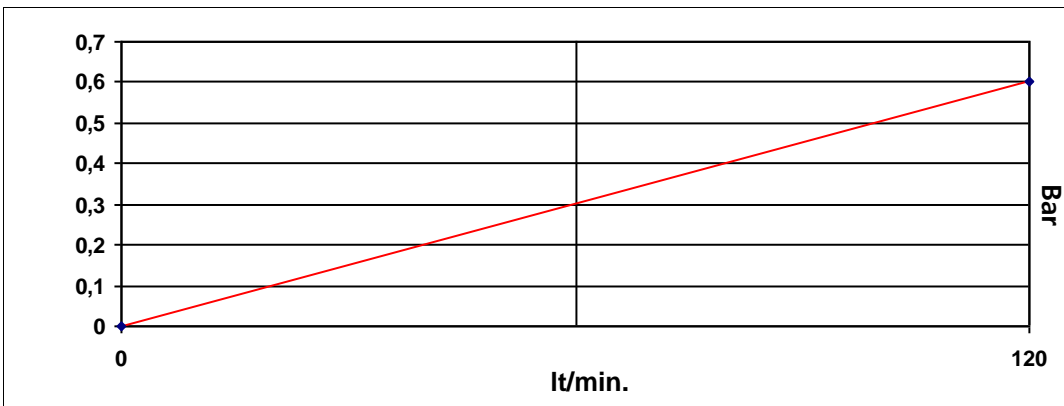


Q: *lt/min.*

Dp: *Bar.*

Q: *GPM*

Dp: *PSI*

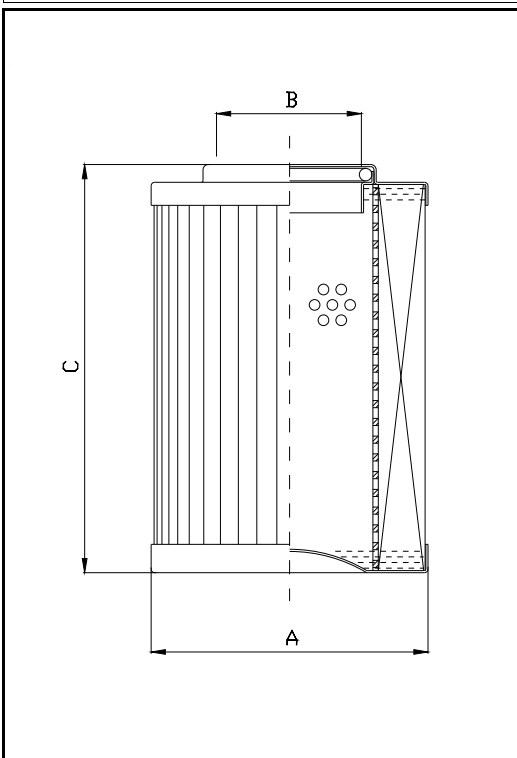

- mm**
- A
 - B
 - C
 - D
 - E
 - F

- inch**
- A
 - B
 - C
 - D
 - E
 - F



Technical drawing not in scale

Image is only representative