

**TECHNICAL DATA SHEET**

Item

**D130G10A**

Revision no.:

**1**

**Filter media:**   
**Filter area:**  *cm<sup>2</sup>*  *Sq. inch*  
**Efficiency:**   $\mu\text{m}$  (c) at  $\beta=$   *in accordance to ISO 16889*  
  $\mu\text{m}$  (c) at  $\beta=$   *in accordance to ISO 16889*  
**Dirt holding capacity in accordance to ISO 16889 at final Dp 5 bar:**  *gr. ISO MTD*  
**Collapse pressure in accordance to ISO 2941:**  *Bar.*  *Psi.*

**By-pass valve:**  **By-pass setting:**  *Bar.*  *Psi.*


**Operating temperature:** *min*   $^{\circ}\text{C}$  *max*   $^{\circ}\text{C}$

**Flow:**  **Seal:**

**Fluid compatibility :**

**Notes :**

**Pressure drop charts in accordance to ISO 3968 (Class B) at clean element 30 cst viscosity 0,86 Kg/dm<sup>3</sup> density mineral oil.**

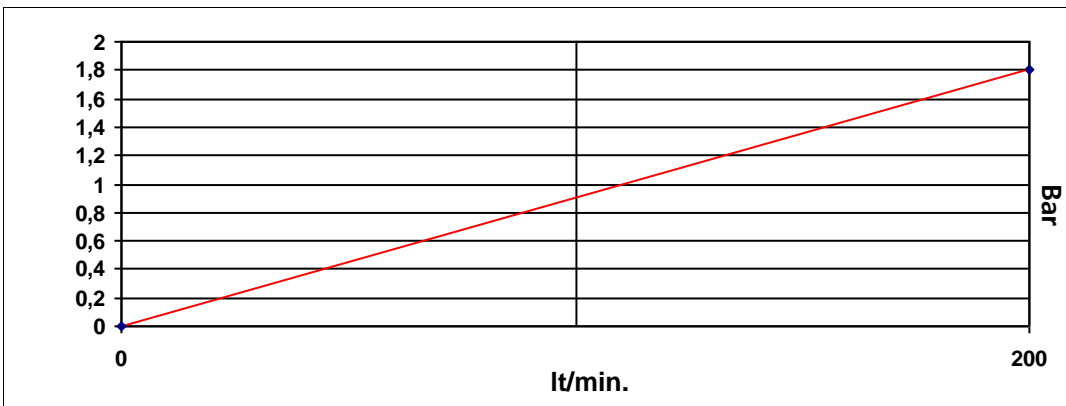


**Q:**  *lt/min.*

**Dp:**  *Bar.*

**Q:**  *GPM*

**Dp:**  *PSI*

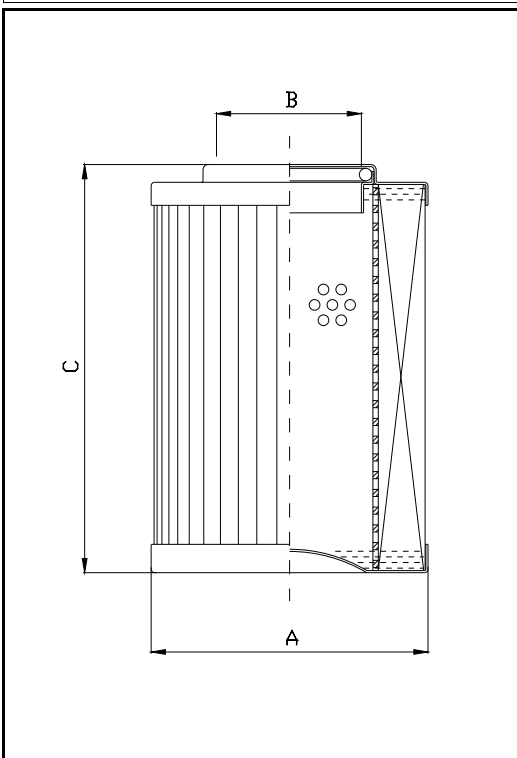

**mm**  
**A**   
**B**   
**C**   
**D**   
**E**   
**F**

**inch**  
**A**   
**B**   
**C**   
**D**   
**E**   
**F**



*Technical drawing not in scale*

*Image is only representative*