

**TECHNICAL DATA SHEET** Item

**D151G10A**

Revision no.:

Filter media: INORGANIC FIBERGLASS

 Filter area: 3.556 cm<sup>2</sup> 552 Sq. inch

Efficiency: 10 μm (c) at β= 200 in accordance to ISO 16889

12 μm (c) at β= 1000 in accordance to ISO 16889

Dirt holding capacity in accordance to ISO 16889 at final Dp 5 bar: 54,05 gr. ISO MTD

Collapse pressure in accordance to ISO 2941: 21 Bar. 304 Psi.

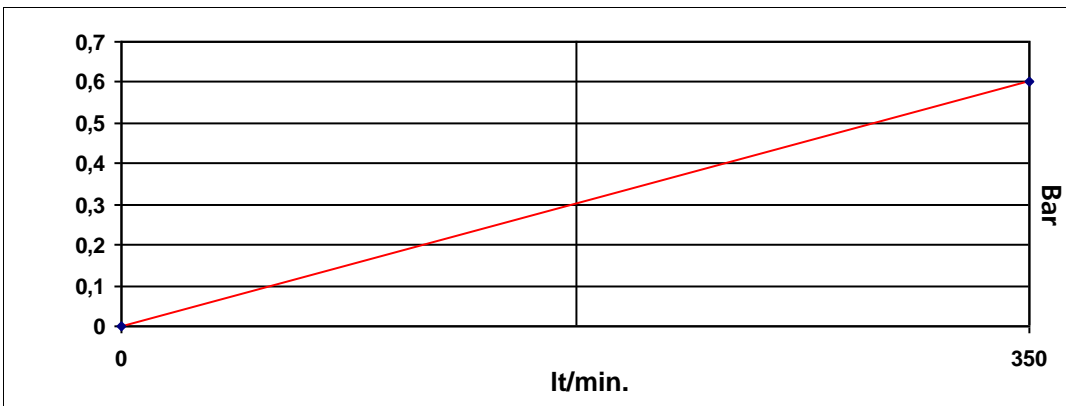
By-pass valve: NO By-pass setting: Bar. Psi.

Operating temperature: min -25 °C max 120 °C

Flow: EST-INT Seal: NBR

Fluid compatibility : mineral oil (HH,HL,HM,HV)

Notes :

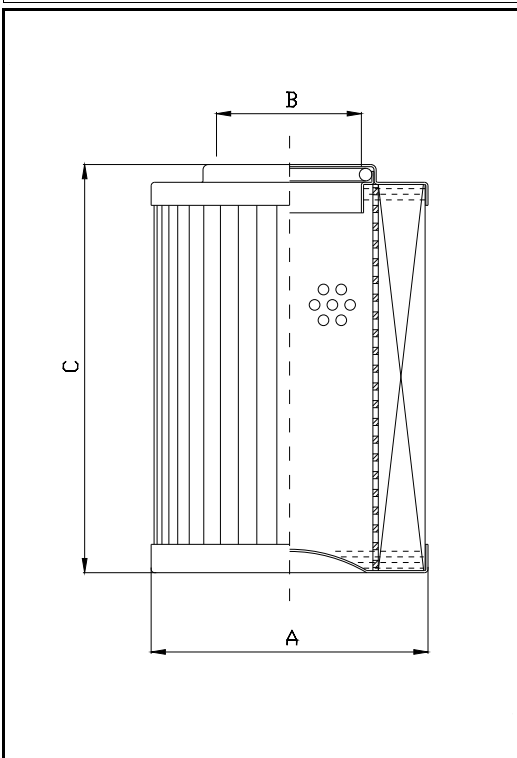
 Pressure drop charts in accordance to ISO 3968 (Class B) at clean element 30 cst viscosity 0,86 Kg/dm<sup>3</sup> density mineral oil.


Q: 350 lt/min.

Dp: 0,6 Bar.

Q: 92,46 GPM

Dp: 8,70 PSI


 mm  
 A 78  
 B 40,5  
 C 235  
 D  
 E  
 F

 inch  
 A 3,07  
 B 1,59  
 C 9,25  
 D  
 E  
 F


Technical drawing not in scale

Image is only representative