

TECHNICAL DATA SHEET

Item

D154G10A

Revision no.:

Filter media: INORGANIC FIBERGLASS
Filter area: 2.074 cm² 322 Sq. inch
Efficiency: 10 μm (c) at β= 200 in accordance to ISO 16889
 12 μm (c) at β= 1000 in accordance to ISO 16889
Dirt holding capacity in accordance to ISO 16889 at final Dp 5 bar: 31,52 gr. ISO MTD
Collapse pressure in accordance to ISO 2941: 21 Bar. 304 Psi.

By-pass valve: NO **By-pass setting:** Bar. Psi.


Operating temperature: min -25 °C max 120 °C

Flow: EST-INT **Seal:** NBR

Fluid compatibility : mineral oil (HH,HL,HM,HV)

Notes :

Pressure drop charts in accordance to ISO 3968 (Class B) at clean element 30 cst viscosity 0,86 Kg/dm³ density mineral oil.

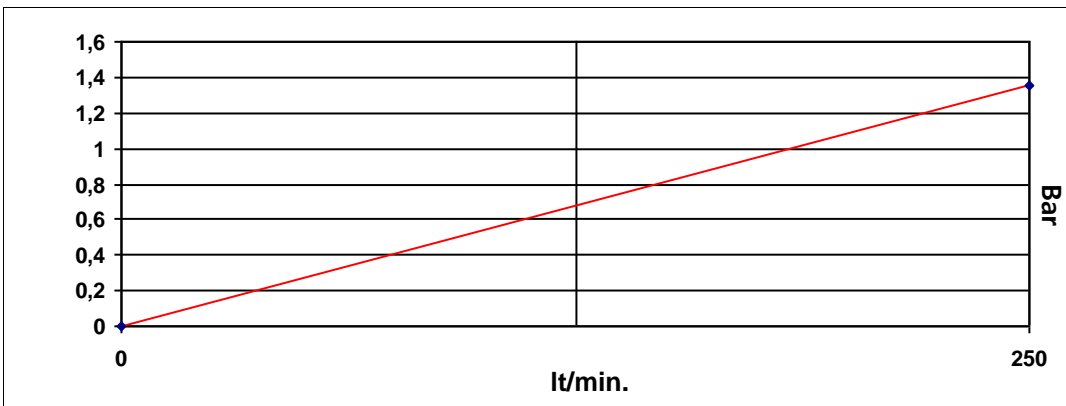


Q: 250 **lt/min.**

Dp: 1,35 **Bar.**

Q: 66,04 **GPM**

Dp: 19,58 **PSI**

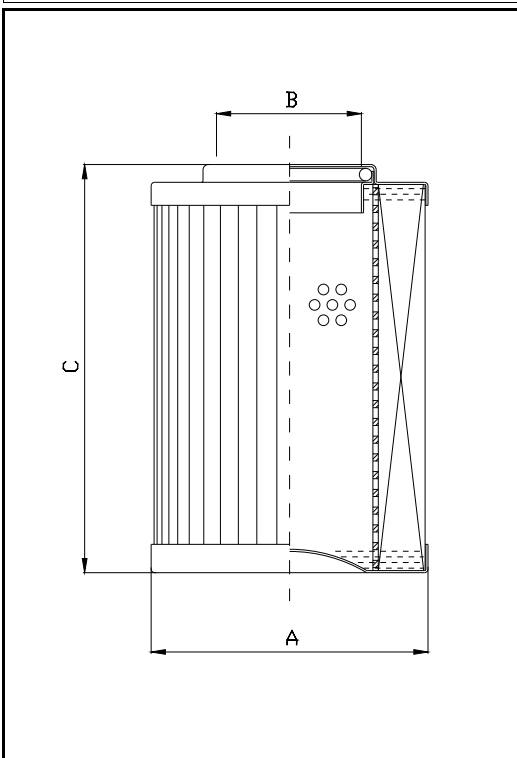

mm
A 78
B 40,5
C 140
D
E
F

inch
A 3,07
B 1,59
C 5,51
D
E
F



Technical drawing not in scale

Image is only representative