

TECHNICAL DATA SHEET

Item

D154T60A

Revision no.:

Filter media: WIRE MESH
Filter area: 2.074 cm² 322 Sq. inch
Efficiency: 60 μm

Collapse pressure in accordance to ISO 2941: 21 Bar. 304 Psi.

By-pass valve: NO **By-pass setting:** Bar. Psi.


Operating temperature: min -25 °C max 120 °C

Flow: EST-INT **Seal:** NBR

Fluid compatibility : mineral oil (HH,HL,HM,HV)

Notes :

Pressure drop charts in accordance to ISO 3968 (Class B) at clean element 30 cst viscosity 0,86 Kg/dm³ density mineral oil.

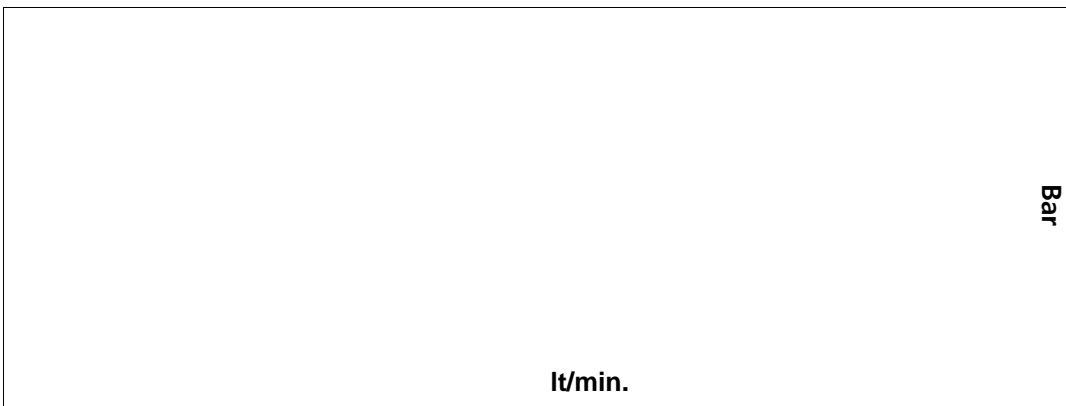


Q: It/min.
 Dp: Bar.

Q: GPM
 Dp: PSI

Bar

It/min.

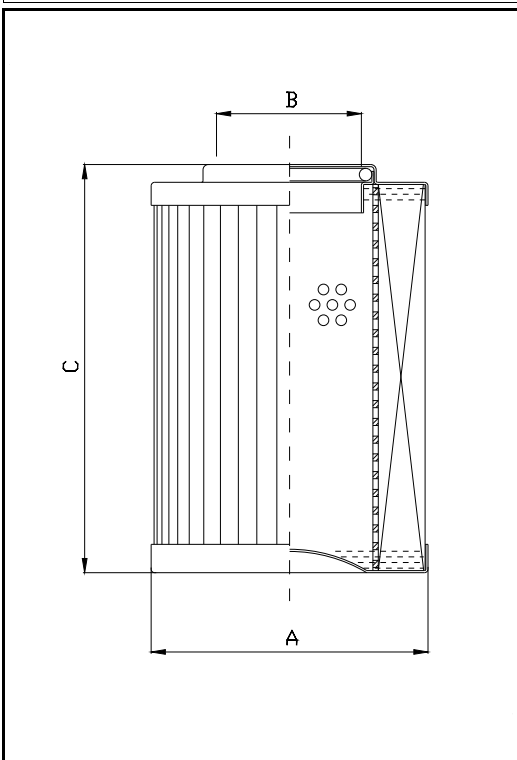

mm
 A 78
 B 40,5
 C 140
 D
 E
 F

inch
 A 3,07
 B 1,59
 C 5,51
 D
 E
 F



Technical drawing not in scale

Image is only representative