

**TECHNICAL DATA SHEET** Item

**R122T60B**

 Revision no.: 

Filter media:   
 Filter area:  *cm*<sup>2</sup>  *Sq. inch*  
 Efficiency:  *μm*

Collapse pressure in accordance to ISO 2941:  *Bar.*  *Psi.*

By-pass valve:  *By-pass setting:*  *Bar.*  *Psi.*


Operating temperature: *min*  *°C* *max*  *°C*

Flow:  *Seal:*

Fluid compatibility :


Notes :

Pressure drop charts in accordance to ISO 3968 (Class B) at clean element 30 cst viscosity 0,86 Kg/dm<sup>3</sup> density mineral oil.

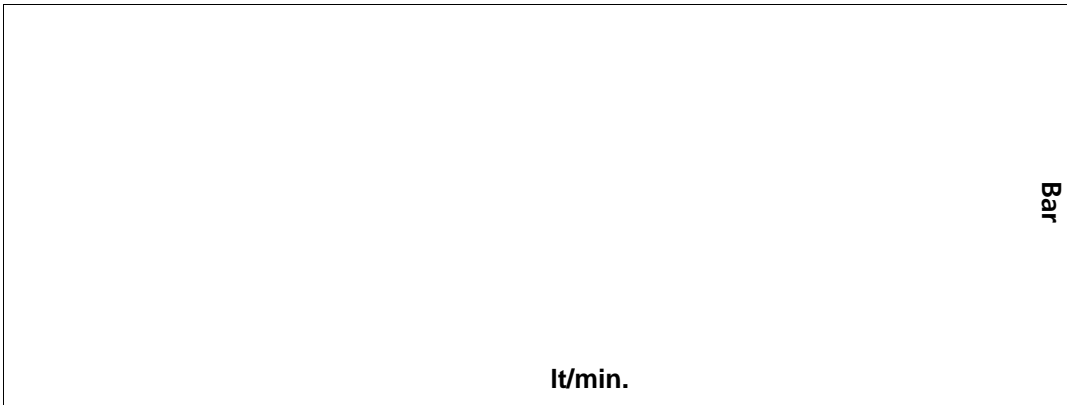

Q:  *lt/min.*  
 Dp:  *Bar.*

Q:  *GPM*  
 Dp:  *PSI*

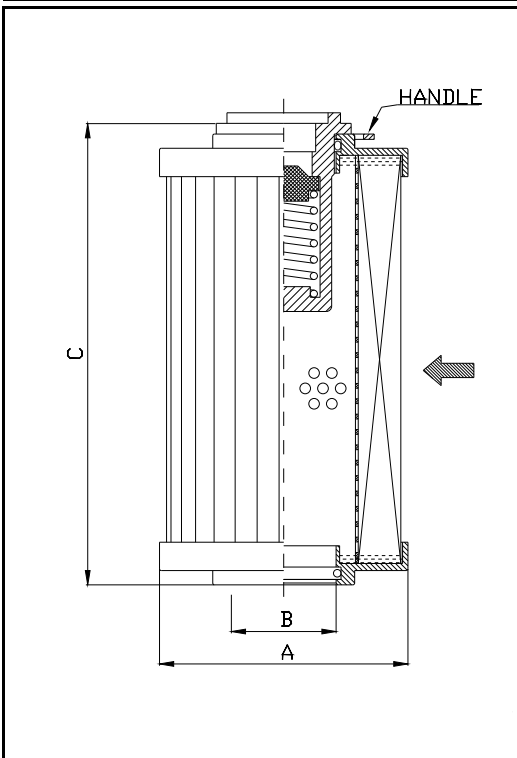

*mm*  
 A   
 B   
 C   
 D   
 E   
 F

*inch*  
 A   
 B   
 C   
 D   
 E   
 F



Technical drawing not in scale

Image is only representative