

TECHNICAL DATA SHEET

Item

D140G10A

Revision no.:

 Filter media:

 Filter area: *cm*² *Sq. inch*

 Efficiency: μm (c) at $\beta=$ *in accordance to ISO 16889*
 μm (c) at $\beta=$ *in accordance to ISO 16889*

 Dirt holding capacity in accordance to ISO 16889 at final Dp 5 bar: *gr. ISO MTD*

 Collapse pressure in accordance to ISO 2941: *Bar.* *Psi.*

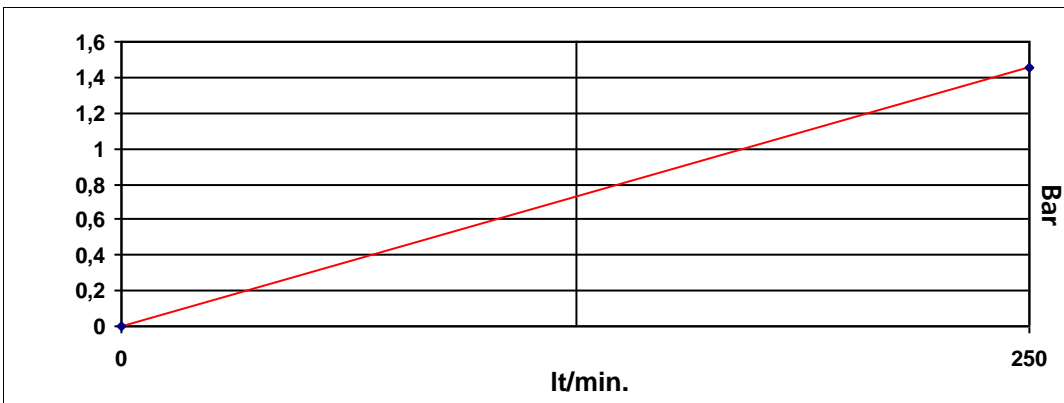
 By-pass valve: *By-pass setting:* *Bar.* *Psi.*

 Operating temperature: *min* $^{\circ}\text{C}$ *max* $^{\circ}\text{C}$

 Flow: *Seal:*

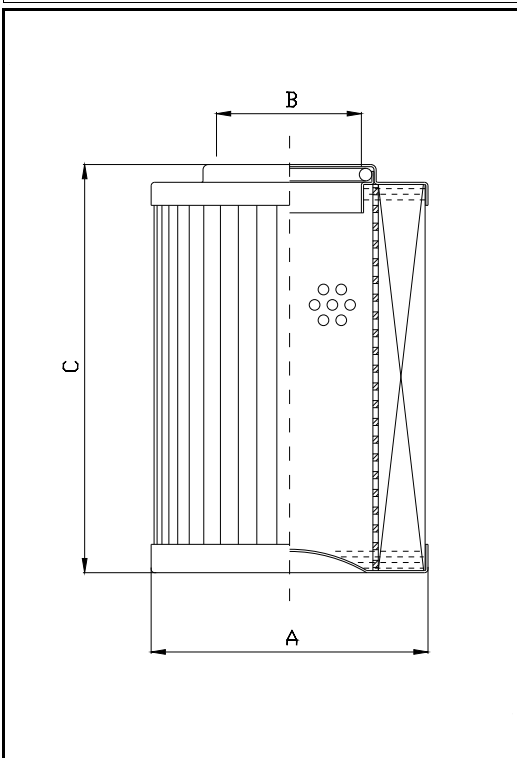
 Fluid compatibility :

 Notes :

 Pressure drop charts in accordance to ISO 3968 (Class B) at clean element 30 cst viscosity 0,86 Kg/dm³ density mineral oil.

 Q: *lt/min.*

 Dp: *Bar.*

 Q: *GPM*

 Dp: *PSI*


mm

 A

 B

 C

 D

 E

 F

inch

 A

 B

 C

 D

 E

 F


Technical drawing not in scale

Image is only representative